





Metering Disc **AMT**

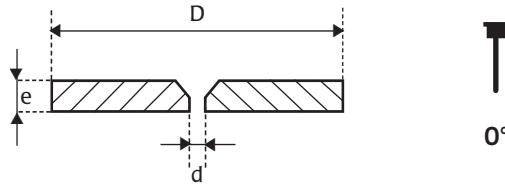


APPLICATIONS

ALBUZ ceramic characteristics allow spraying high pressures while maintaining performance and precision. Exist in several dimensions: diameters 0.27, 0.59 and 0.71 inches.

REF	7010	7011	7012	7015	7018	7020	7023	15007	15008	15010	15012	15015	15018	15020	15023	15030	15040	15060	18008	18010	18012	18015	18018	18020	18023
D (inche)	.27							.59									.71								
d* (inche)	0.039	0.043	0.047	0.059	0.07	0.078	0.09	0.027	0.031	0.039	0.047	0.059	0.07	0.078	0.09	0.11	0.157	0.236	0.031	0.043	0.047	0.059	0.07	0.078	0.09
e (inche)	0.11							0.12									0.078								

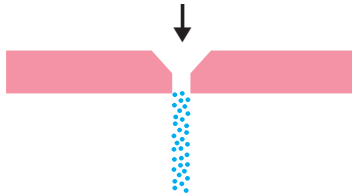

PSI	gpm									
	AMT ..007	AMT ..008	AMT ..010	AMT ..012	AMT ..015	AMT ..018	AMT ..020	AMT ..023	AMT ..030	AMT ..040
30	0.11	0.15	0.24	0.31	0.51	0.68	0.83	1.07	1.73	3.23
40	0.13	0.17	0.28	0.35	0.58	0.79	0.96	1.24	2.02	3.77
60	0.16	0.20	0.34	0.43	0.70	0.97	1.17	1.53	2.50	4.71
70	0.17	0.22	0.36	0.46	0.75	1.04	1.26	1.66	2.71	5.12
150	0.24	0.31	0.51	0.67	1.07	1.53	1.84	2.46	4.07	7.76
220	0.29	0.37	0.6	0.81	1.28	1.85	2.22	3	4.99	9.56
290	0.33	0.42	0.68	0.93	1.46	2.13	2.55	3.47	5.78	11.11
440	0.40	0.51	0.82	1.14	1.77	2.62	3.13	4.3	7.21	13.95
730	0.51	0.54	1.04	1.46	2.24	3.38	4.03	5.6	9.44	18.38

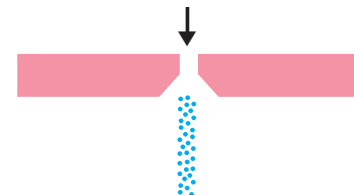

PSI	gpm									
	AMT ..007	AMT ..008	AMT ..010	AMT ..012	AMT ..015	AMT ..018	AMT ..020	AMT ..023	AMT ..030	AMT ..040
30	0.11	0.12	0.17	0.25	0.38	0.53	0.66	0.86	1.39	2.88
40	0.13	0.13	0.2	0.29	0.44	0.61	0.76	0.99	1.62	3.37
60	0.15	0.16	0.24	0.35	0.54	0.75	0.94	1.21	2.02	4.20
70	0.16	0.18	0.26	0.38	0.58	0.81	1.02	1.31	2.19	4.56
150	0.24	0.26	0.38	0.56	0.85	1.19	1.5	1.91	3.29	6.9
220	0.29	0.31	0.46	0.67	1.02	1.44	1.82	2.32	4.04	8.5
290	0.33	0.35	0.53	0.77	1.17	1.65	2.1	2.66	4.68	9.87
440	0.40	0.43	0.65	0.95	1.44	2.04	2.6	3.28	5.84	12.38
730	0.52	0.56	0.83	1.21	1.85	2.62	3.36	4.22	7.66	16.3